

K-Shear[®] Accelerometer

Type 8791A250

Miniature, Voltage Mode Triaxial Accelerometer

The triaxial accelerometer Type 8791A250 measures shock and vibration in three orthogonal axes. Weighing only 4 grams with a cube size of 10,2 mm, this 250 g range triaxial accelerometer is housed in a welded titanium case and features an integral four conductor shielded cable terminated in a male Microtech compatible connector.

- Low impedance voltage output
- Quartz shear sensing elements
- High immunity to thermal transients
- Ultra-low base strain sensitivity
- Miniature cube design
- Light weight
- Conforming to CE


Description

The Type 8791A250 is a low impedance, voltage mode triaxial accelerometer housed in a miniature, cube-shaped enclosure and designed for adhesive mounting. The triaxial design permits simultaneous impact and vibration measurements in three mutually perpendicular axes: X, Y and Z.

Kistler's K-Shear element design provides a wide operating frequency range along with extremely low sensitivity to thermal transients, base strain and transverse acceleration. Quartz sensing crystals ensure the long-term stability not achievable with other sensing materials. Three Piezotron[®] microelectronic circuits convert the charge signal from each quartz element into a useable high level voltage signal at a low impedance output allowing the use of low-cost cables. An advantage of a low impedance output is the ability to drive long cable lengths with low-noise susceptibility. The unit is housed in a welded titanium case with the integral cable epoxy sealed to the housing.

Application

The extremely low weight of the accelerometer Type 8791A250 is highly attractive where mass loading of test structure is a major concern. The compact size offers high accessibility and convenient locating where critical placement is required. The sensor is highly suited for modal analysis applications, general vibration measurements during product development where the advantage of compactness is a plus.

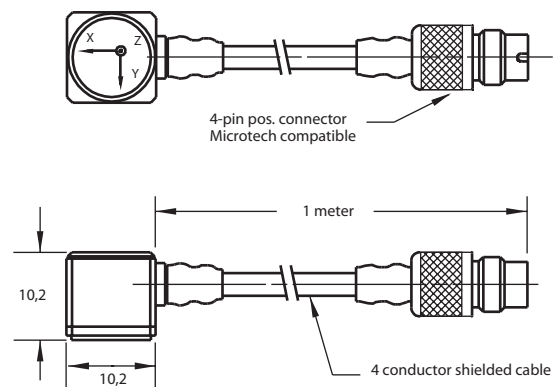

8791A_000-259e-07.08

Technical Data

Specification	Unit	Type 8791A250
Acceleration range	g	±250
Threshold (noise 130 µVrms), nom.	grms	0,006
Sensitivity, ±15 %	mV/g	20
Resonant frequency mounted, nom.	kHz	18
Frequency response, ±5 %	Hz	2 ... 2 000
Amplitude non-linearity	%FSO	±1
Time constant, nom.	s	0,3

Environmental

Base strain sensitivity, @ 250 µε	g/µε	0,01
Random vibration, max.	grms	±500
Shock limit (1 ms pulse)	gpk	3 000
Temperature coefficient of sensitivity	%/°C	-0,05
Operating temperature range	°C	-55 ... 120

Output

Bias, nom.	VDC	11
Impedance	Ω	≤100
Voltage full scale	V	±5
Current	mA	2

Source

Voltage	VDC	18 ... 30
Constant current	mA	2 ... 20
Impedance, min.	kΩ	100

Construction

Sensing element	Type	quartz-shear
Case/base	material	titanium
Degree of protection case/connector (EN 60529)		IP66
Connector	Type	4-pin pos.
Ground isolated		no
Mass	grams	4
Mounting	Type	adhesive/wax

1 g = 9,80665 m/s², 1 Inch = 25,4 mm, 1 gram = 0,03527 oz, 1 lbf-in = 0,113 N-m

Mounting

Reliable and accurate measurements require that the mounting surface be clean and flat. The sensor can be attached to the structure with wax or adhesive. The Instruction Manual for the Type 8791A250 provides detailed information regarding mounting surface preparation.

Included Accessories

- Mounting wax

Type
8432

Ordering Code

- K-Shear-Accelerometer, miniature, range ±250 g

Type
8791A250

Measuring Chain

- 1 Low impedance sensor
- 2 Sensor cable, 10-32 pos. to BNC pos.
- 3 Power supply/signal conditioner
- 4 Output cable, BNC pos. to BNC pos.

Type
8791A250
1761B...
51...
1511

